



SS22 THRU SS210

2.0 AMPS. Surface Mount Schottky Barrier Rectifiers



Voltage Range
20 to 100 Volts
Current
2.0 Amperes


SMB/DO-214AA

Features

- ✧ For surface mounted application
- ✧ Metal to silicon rectifier, majority carrier conduction
- ✧ Low forward voltage drop
- ✧ Easy pick and place
- ✧ High surge current capability
- ✧ Plastic material used carriers Underwriters Laboratory Classification 94V-0
- ✧ Epitaxial construction
- ✧ High temperature soldering: 260°C / 10 seconds at terminals

Mechanical Data

- ✧ Case: Molded plastic
- ✧ Terminals: Solder plated
- ✧ Polarity: Indicated by cathode band
- ✧ Packaging: 12mm tape per EIA STD RS-481
- ✧ Weight: 0.093gram

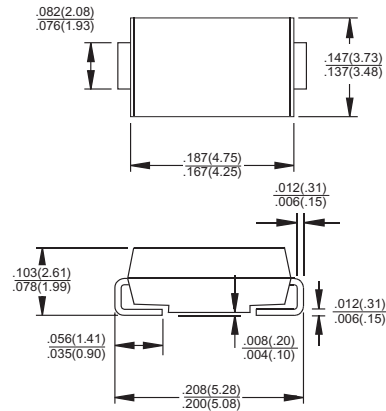

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	SS 22	SS 23	SS 24	SS 25	SS 26	SS 29	SS 210	Units	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	30	40	50	60	90	100	V	
Maximum RMS Voltage	V_{RMS}	14	21	28	35	42	63	70	V	
Maximum DC Blocking Voltage	V_{DC}	20	30	40	50	60	90	100	V	
Maximum Average Forward Rectified Current at T_L (See Fig. 1)	$I_{(AV)}$	2.0							A	
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	50							A	
Maximum Instantaneous Forward Voltage (Note 1) @ 2.0A	V_F	0.5			0.70		0.85		V	
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=100^\circ\text{C}$	I_R	0.4					0.1		mA	
		20			10.0		20			
Typical Junction Capacitance (Note 3)	C_j	130							pF	
Typical Thermal Resistance (Note 2)	$R_{\theta JL}$	17							$^\circ\text{C}/\text{W}$	
	$R_{\theta JA}$	75								
Operating Temperature Range	T_J	-65 to +125				-65 to +150				$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150								$^\circ\text{C}$

- Notes: 1. Pulse Test with PW=300 usec, 1% Duty Cycle
 2. Measured on P.C. Board with 0.27 x 0.27" (7.0 x 7.0mm) Copper Pad Areas.
 3. Measured at 1 MHz and Applied Reverse Voltage of 4.0V D.C.

RATINGS AND CHARACTERISTIC CURVES (SS22 THRU SS210)

FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

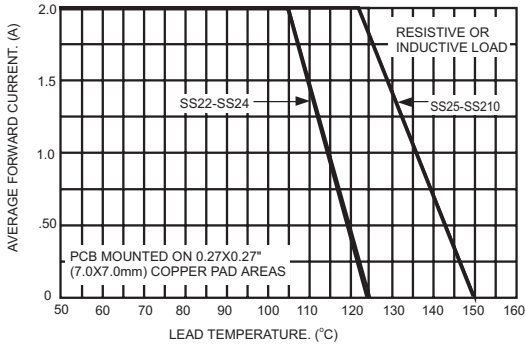


FIG.2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

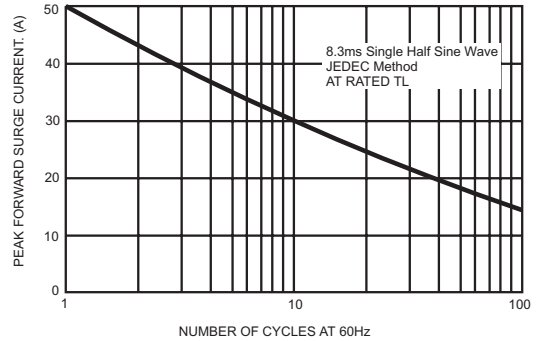


FIG.3- TYPICAL FORWARD CHARACTERISTICS

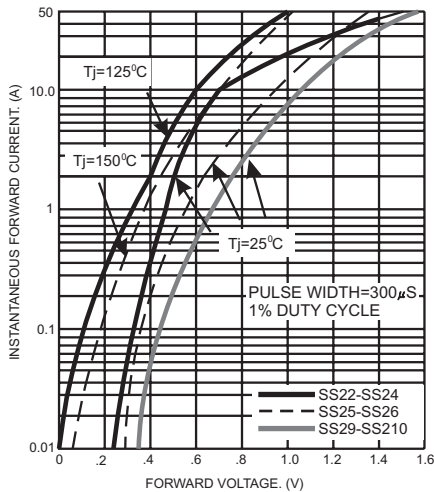


FIG.4- TYPICAL REVERSE CHARACTERISTICS

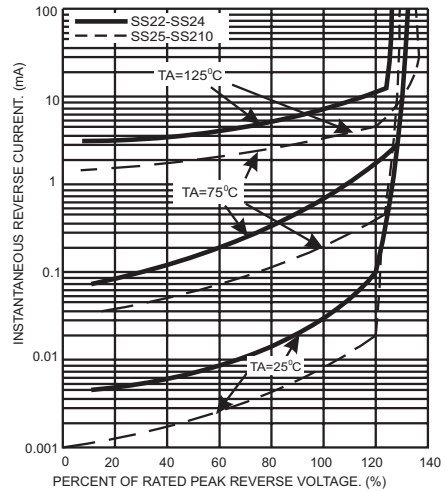


FIG.5- TYPICAL JUNCTION CAPACITANCE

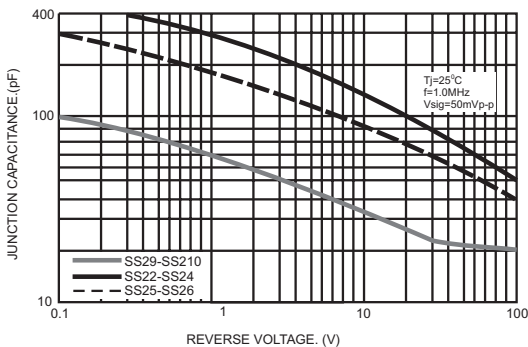


FIG.6- TYPICAL CAPACITANCE

